

M/V "Trident Star"


58,000 dwt Bulk Carrier

CALL SIGN	VROR5
FLAG	HONG KONG
PORT OF REGISTRY	HONG KONG
OFFICIAL NUMBER	HK-4373
IMO/LLOYDS NUMBER	9707637
CLASS SOCIETY	NK
P & I CLUB	GARD
CLASS NOTATION	NS*(CSR, BC-A, BC-XII, GRAB 20, PSPC-WBT)
	(ESP)(IWS)(PSCM)(BWTS)(IHM)MNS*(M0)

KEEL LAID	13-May-15
LAUNCHED	14-Jul-15
DELIVERED	8-Oct-15
SHIPYARD	TSUNEISHI HEAVY INDUSTRIES (CEBU), INC.



PRINCIPAL DIMENSIONS	
LOA	189.99 M
LBP	
BREADTH (Extreme)	
DEPTH (molded)	
HEIGHT (maximum)	
BRIDGE FRONT - BOW	
BRIDGE FRONT - STERN	
LIGHT SHIP DISPLACEMENT	

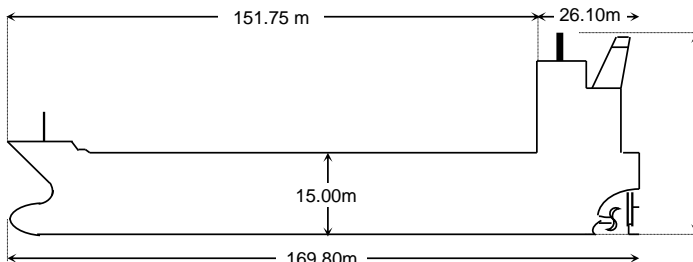

TONNAGE	REGD	SUEZ	PANAM
NET	19,449	32,241	26,841
GROSS	32,370	32,694.28	32,370
GROSS Reduced (R'n:13495)	N/A	N/A	

LOAD LINE INFORMATION	FREEBOARD	DRAFT	DWT
TROPICAL	4.958 m	13.094 m	59,371
SUMMER	5.225 m	12.827 m	57,836
WINTER	5.492 m	12.560 m	56,302
TROPICAL, LUMBER			
SUMMER, LUMBER			
WINTER, LUMBER			
NORMAL BALLAST			
HEAVY BALLAST			
FWA			
TPC @ Summer draft			

TANK CAPACITIES (cbm)					
GRAIN		BALE		BALLAST TANK(100%)	
CARGO HOLD 1		CARGO HOLD 1		FPT	
CARGO HOLD 2		CARGO HOLD 2		WBT1 P/S	
CARGO HOLD 3		CARGO HOLD 3		DBT 1 P/S	
CARGO HOLD 4		CARGO HOLD 4		WBT 2 C	
CARGO HOLD 5		CARGO HOLD 5		DBT 2 P/S	
TOTAL	0.0	TOTAL	0	WBT 3 P/S	
LOG/LUMBER CAPACITY		Deck Stanchion		WBT 4 P/S	
DECK(CBM)	HOLD(CBM)	Height(M)		HBT 5 P/S	
				APT	
Total: 0	Total: 0			TOTAL	

MACHINERY / PROPELLER / RUDDER	
MAIN ENGINE	MITSUI MAN B&W 6S50ME-B8.3
M.C.R.	
N.C.R.	
MAX CRITICAL RANGE	
AUX. BOILER (1 set)	
GENERATOR (3 sets)	
EMER D.G. (1 set)	
PROPELLER	
RUDDER	
STEERING GEAR	
FW GENERATOR CAP	

HFO TANKS(100%)	
NO.1 P	
NO.1 S	
NO.5 P	
NO.5 S	
TOTAL	0
MDO TANKS(100%)	
NO.5 DO.P	
NO.5 MGO.S	

WINCHES / WINDLASS / ROPES / EMERGENCY TOWING			
	FWD	AFT	PARTICULARS
WINCHES			
WINDLASS		N/A	
ANCHOR		N/A	
Emg. Towing			
F.W Tanks 100%			
F.W.P	156		
D.F.W.T S	156		
TOTAL:	312		

CARGO AND BALLAST PUMPING SYSTEM			
MAIN PUMPS	NO.	CAPACITY	HEAD
BALLAST P/P	1		
FIRE GS P/P	1		
BALLAST Eductor	1		

LIFE BOAT	
RESCUE BOAT	
LIFE RAFTS	
L/RAFT HANDLING DAVIT	

HATCH COVER SIZE		OTHER DETAILS	
TANKTOP STRENGTH		TANKTOP DIMENSIONS	
		HOLD 1	18.2m X 17.00m
HATCH COVER STRENGTH	H1-5 4.0t/m²	HOLD 2	21.6m X 18.60m
		HOLD 3	21.6m X 18.60m
UPPER DECK STRENGTH		HOLD 4	21.6m X 18.60m
		HOLD 5	20.93m X 18.6m

DECK CRANES			
Distance WL - Coaming	Hatch No.1	Midships	Last Hatch
Ballast condition			
Full ballast condition			
Light condition			
Full laden condition			
Distance from Keel to top of hatch coaming:			

Min Bow Drift:	
Propeller Immer.:	
Cement hole Dia:	
A60 :	

FIRE FIGHTING SYSTEM	
E/RM	
CARGO HOLD	
DECK AREA	



Uni-Asia Holdings Limited | Uni-Asia Shipping Limited

30/F, Prosperity Millenia Plaza, 663 King's Road, North Point, Hong Kong | T +852 2528 5016 | F +852 2528 5020
www.uni-asia.com | www.uniasiashipping